


Please Approve this Drawing	
Date	
Signature	

NO.	Part Name	Q'TY	Material	Plated surface
1	Plunger	1	Brass	Au 3u" Min. Over 50u" Min. Ni
2	Barrel	1	Brass	AU 3U" MIN OVER 50 U" Min. NI
3	Spring	1	SUS304	N/A
4				
5				

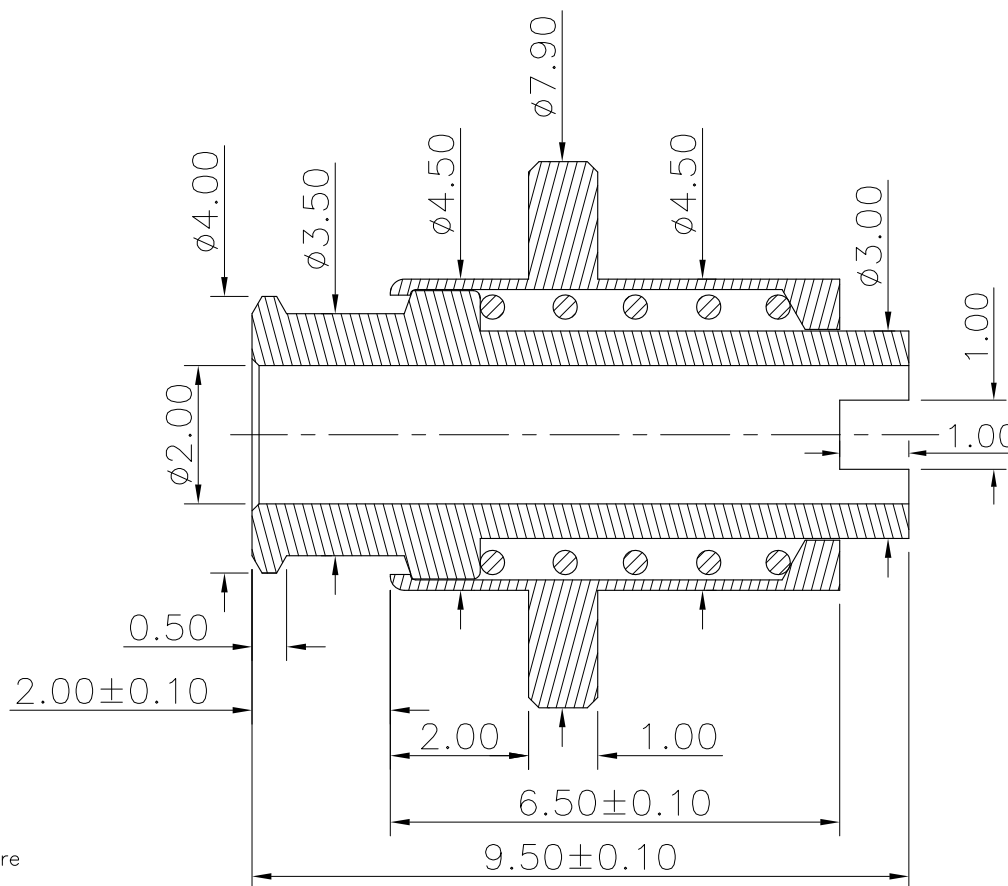

NOTES:

- Electrical
  - .Rated Current & Voltage : DC 12 V ; 3.0A Max.
  - .Contact Resistance: 50 mohm maximum at Working Height(Quiescence)
- Mechanical
  - .Full store: 1.50 mm
  - .Spring Force: 120gf±20%gf at 1.00mm Working store
  - .Durability:10,000 cycles(minimum)
- Environmental
  - .Operating Temperature: -25°C~+85°C
  - .Humidity Range: 10%RH~90%RH
  - .Salt Spray: 48 Hours
- When the current is greater than 1A then need to increase the time delay circuit(3 second)
- To avoid arcing issue, The adaptor start to power supply after connector mated fully.
- To ensure the best usage,please operate it based on the working height.
- .RoHs&HF compliant product.

DRAWN	lys	DATE	2020.05.25		东莞市燊瑞电子科技有限公司	
CHECKED		SCALE	10:1	VER. B.0		
APPROVED		TITLE	pogo pin		Ang:	Dim:
PROJECT		DRAWING NO.	C1923-01		0 ±1°	0 ±0.15
SHEET	1 of 1	UNIT	mm		.0 ±0.5°	.0 ±0.10
					.00 ±0.25°	.00 ±0.05

VER.	DESCRIPTION	ECN NO.	DATE