


NO.	Part Number	Part Name	Version	Q'TY	Material	Plated surface
1	Z1823-1100A	Plunger	B.0	1	SUS303	
2	K1823-1100A	Barrel	B.1	1	SUS303	
3	T1928-1A	Spring	B.0	1	SUS 304	
4	1.50mm 挡圈	挡圈	B.0	1	SUS 304	
5						

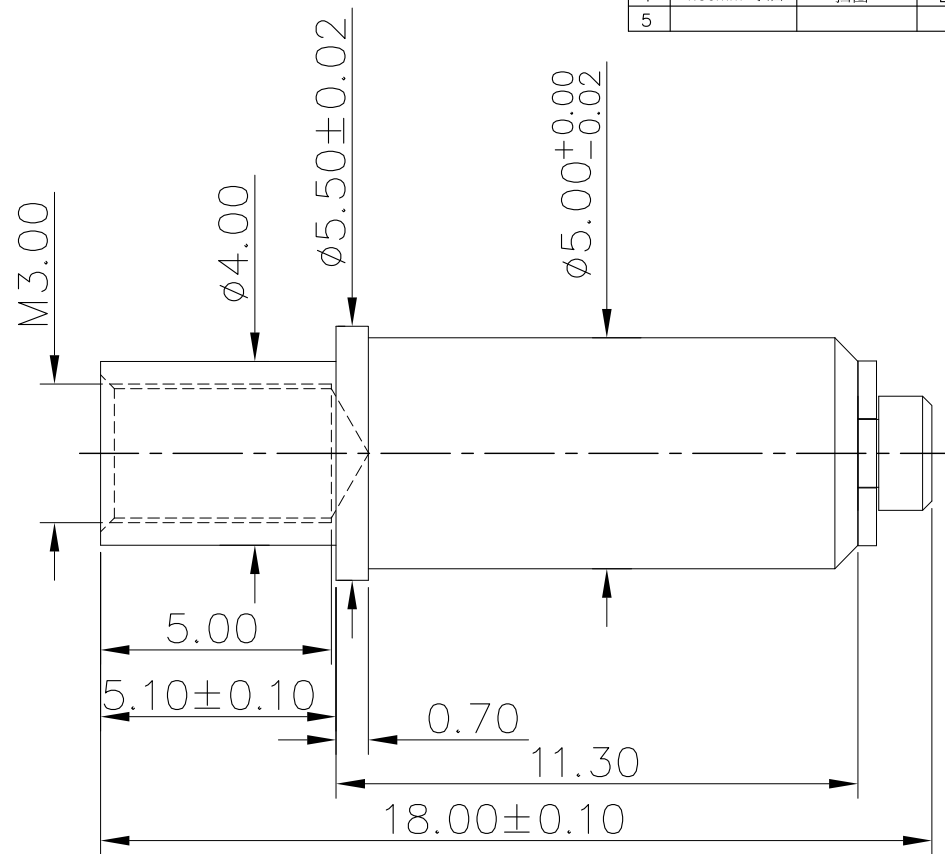

NOTES:

- Mechanical
 - .Full store: 5.00 mm
 - .Working Store: 5.00 mm
 - .Spring Force: 10N±10% at Normal Working Height
 - .Durability:100,000 cycles(minimum)
- Environmental
 - .Operating Temperature: -25°C~+85°C
 - .Humidity Range: 10%RH~90%RH
 - .Salt Spray: 48 Hours
- To ensure the best usage,please operate it based on the working height.

VER.	DESCRIPTION	ECN NO.	DATE

DRAWN	lys	DATE	2020.05.25			东莞市燊瑞电子科技有限公司			
CHECKED		SCALE	10:1	VER.	B.0				
APPROVED		TITLE	pogo pin connector.			Ang:		Dim:	
PROJECT		DRAWING NO.	C1928-01			0	±1°	0	±0.15
SHEET	1 of 1	UNIT	mm			.0	±0.5°	.0	±0.10
						.00	±0.25°	.00	±0.05