


Please Approve this Drawing	
Date	
Signature	

NO.	Part Name	Q'TY	Material	Plated surface
1	Plunger	1	C3604	Ni 80~150u"
2	Barrel	1	C3604	Ni 80~150u"
3	档圈	1	SUS	N/A
4	Spring	1	SUS	N/A

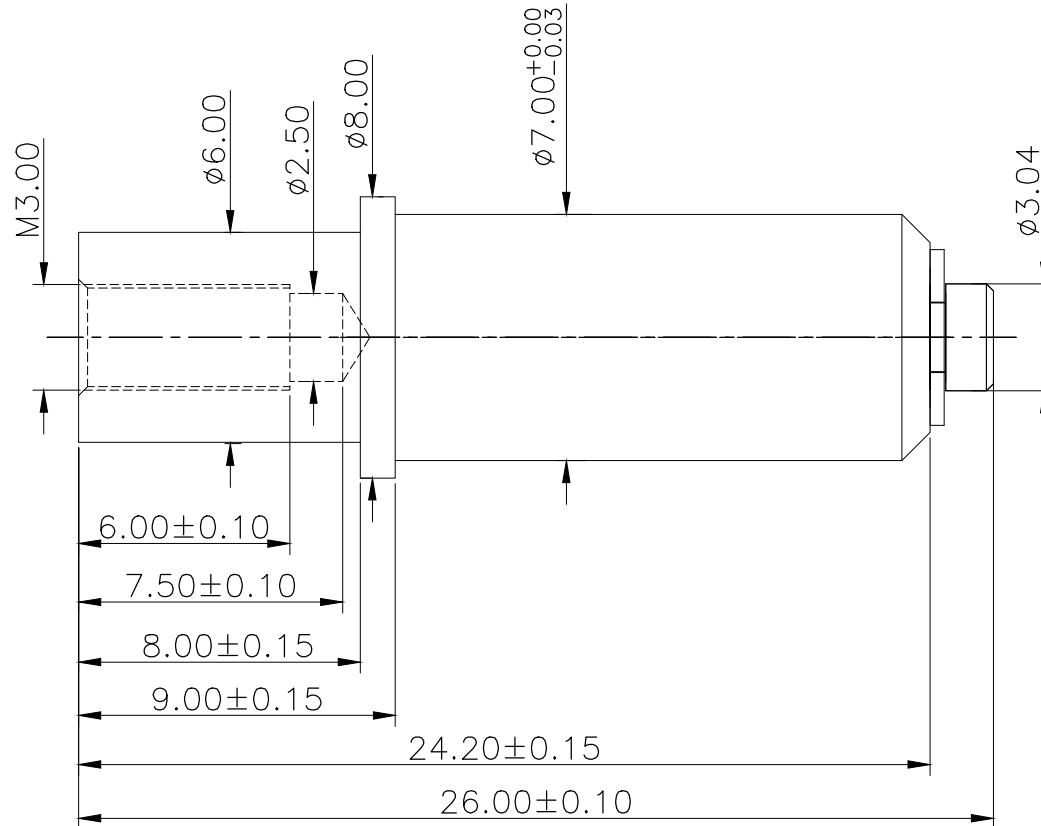

NOTES:

- Mechanical
  - .Max Compression: 7.90 mm
  - .Working Stroke: 4.00 mm
  - .Spring Force: 20N±10% at Working Stroke
  - .Durability:30,000 cycles(minimum) at Working Stroke
- Environmental
  - .Operating Temperature: -25°C~+85°C
  - .Humidity Range: 10%RH~90%RH
  - .Salt Spray: 48 Hours
- To ensure the best usage, please operate it based on the working height.

B.0	初版发行	ECN-20200915-3	20200915
VER.	DESCRIPTION	ECN NO.	DATE

DRAWN	Tony	DATE	2020.09.09		东莞市燊瑞电子科技有限公司	
CHECKED		SCALE	10:1	VER.		
APPROVED		TITLE	Pogo pin		Ang:	Dim:
PROJECT		DRAWING NO.	C2279-01		0 ±1°	0 ±0.20
SHEET	1 of 1	UNIT	mm		.0 ±0.5°	.0 ±0.15
					.00 ±0.25°	.00 ±0.10